



# intAct Start-Stop-Power AGM

Sealed maintenance-free AGM battery | electrolyte absorbed in glass fibre mats | wet charged

Art.No.

## AGM80SS

Volt	12V
Capacity	80 AH (c20)
CCR -18°C (EN)	800 A (EN)
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	315 x 175 x 190 mm
Weight	22,8 kg
Pos. of Terminal	0
Terminal	1
Base plate	B13

### Usage




## Start. Stop. Keep charging.


Enables a high number of engine starts and supplies all consumers when the motor stops. Perfect for taxis, medium and high-end cars, SUVs and trucks with start-stop systems and micro-hybrids with brake energy recovery (recuperation). Our recommendation for start-stop vehicles with high energy demand and micro-hybrids with recuperation.

- » **Excellent starting characteristics** even at low charge level.
- » **Higher cycle stability and cold start performance** than a standard starter battery of same case size. Resulting in a **longer life expectancy**.
- » **Fantastic recharging behaviour** in the partial charge range.
- » **Also for vehicles with high energy requirements and/or a lot of additional equipment.**
- » **Double lid with safety valve (VRLA)**, gas recombination and backfire protection. Leak-proof.


Size




Pos. of Terminal 0



Terminal 1

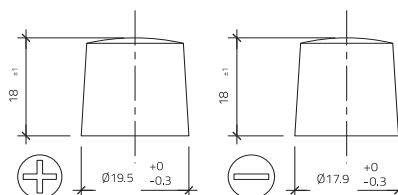

Base plate B13

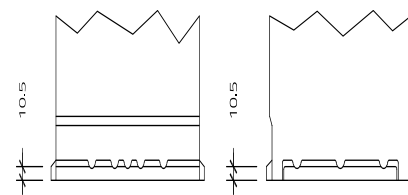

As of 14.07.2023